


# IES 4432 LED Sync Lamp

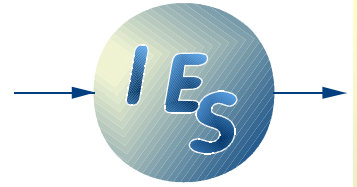

PRELIMINARY SHORTFORM DATA

LED Sync Lamp for high speed video.

- ☺ **400 000 lm**
- ☺ **Replacement for 4 kW HMI lighting**
- ☺ **Selectable illumination angles**
- ☺ **Dimensions 460 x 270 x 140 mm<sup>3</sup>**
- ☺ **Internal LED Controller**
- ☺ **Internal peak power buffer**



**IES** Ingenieurbüro für Elektronikentwicklung und Spezialgerätebau

Postanschrift  
Volkmaroder Strasse 8A  
D-38104 Braunschweig

FON +49 531 701273-0  
FAX +49 531 701273-19

Bankverbindung Postbank Hannover  
BLZ 250 100 30, Konto 905 693 302  
USTIDNr. DE 177335140

## Specifications

Metrics	
Dimensions	460 x 270 x 140 mm <sup>3</sup>
Weight	17 kg

Environment	
Temperature range	0 ... 50 °C

Electrical Interface	
Connector	D-Type 9 pins
Power supply	48 V, 5 A
Communication	RS-485
Sync	RS-485

Illumination Parameters	
Illumination angle	45° (standard, others on request)

### Ordering information: IES 4432

Also available:

- IES 4420 Mini LED Head 12000 lm
- IES 4421 Mini LED Head 24000 lm
- IES 4422 Mini LED Head 12000 lm
- IES 4423 Mini LED Head 24000 lm
- IES 4425 Mini LED Head 48000 lm
- IES 4424 LED Sync Lamp 96000 lm
- IES 4412 Stationary LED Controller
- IES 4414 Onboard LED Controller, 12-16 channels
- IES 4415 Onboard LED Controller, 8 channels
- IES 4416 Onboard LED-Controller, 24 channels and camera support

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.  
Revision 2012-09